arXiv:1202.5032v1 [cond-mat.mes-hall] 22 Feb 2012

Composite pulses for robust universal control of singlet-triplet qubits

Xin Wang[1], Lev S. Bishop[1,2], J. P. Kestner[1], Edwin Barnes[1], Kai Sun[1,2], and S. Das Sarma[1,2]
[1] *Condensed Matter Theory Center, Department of Physics,*
University of Maryland, College Park, Maryland 20742, USA
[2] *Joint Quantum Institute, University of Maryland, College Park, Maryland 20742, USA*

(Dated: February 23, 2012)

Qubit manipulation is fundamental to quantum computing. However, the stray coupling between the qubit and the environment usually present in real experimental systems hinders the high-precision control necessary for a quantum computer with error rates below the quantum error correction threshold. We consider this problem in the context of the singlet-triplet spin qubit in a semiconductor double quantum dot system, where the experimenter has precise control over the exchange interaction only, while statistical fluctuations in the magnetic field gradient produce drift error about the x-axis of the Bloch sphere. The exchange interaction is restricted to be positive and finite. Taking these constraints into account, we design experimentally viable electrical pulse sequences that, for small magnetic field gradients, carry out rotations around $\hat{z}$ while canceling gate errors up to the sixth order in the gradient fluctuations, and for large gradients, perform arbitrary rotations while canceling the leading order error.

A quantum computer would permit exponentially faster algorithms than an ordinary computer for certain important types of problems[1]. Universal quantum computation requires the ability to perform an entangling two-qubit gate and precise single-qubit rotations around two different axes of the Bloch sphere. Semiconductor spin qubits potentially have marked advantages in fast two-qubit gating and scalability, but suffer an embarrassing difficulty in performing fast single-qubit rotations since the strong, high-frequency magnetic fields naïvely required[2] heat the sample and are hard to confine to a single qubit[3]. This problem is circumvented by encoding the qubit in the low-lying singlet-triplet subspace of a two-electron double quantum dot[4,5]. Fast electrical control of the exchange coupling, J, via the tilt of the effective double-well potential allows sub-ns rotations about the z-axis of the Bloch sphere.

In order to perform arbitrary rotations of such a qubit, though, one must introduce a difference, ΔB, between the local magnetic fields at each dot, resulting in rotation about the x-axis of the Bloch sphere. This can be done either by pumping a nuclear spin polarization gradient[6] or by depositing a micromagnet nearby[7]. However, a problem remains: The local magnetic field typically fluctuates slowly due to second-order nuclear spin flip-flops mediated by the hyperfine coupling to the electron spin[8,9] and due to charge-noise-induced shifts of the double dot position in the inhomogeneous field. The resulting uncertainty in ΔB introduces a quasi-static random component to the rotation about the x-axis which, in the course of ensemble averaging, leads to rapid decoherence of the qubit on the free induction decay timescale of T_2^*. In the case of quantum memory, dynamical decoupling techniques[9–13] can be employed to preserve qubit information long beyond T_2^*, up to a time T_2 at which this information is ultimately lost due to dynamical fluctuations. However, such echo techniques cannot be performed simultaneously with arbitrary single-qubit rotations, so gate errors are still dominated by statistical fluctuations and depend on the ratio of the gate time to T_2^* rather than to T_2. It is of utmost importance to address this problem since fault-tolerant quantum computation requires extremely precise single-qubit rotations. Thus the task is to find dynamically corrected gates[14–16] applicable to singlet-triplet qubits. In this work, we show how to perform dynamically corrected single-qubit gates, dramatically reducing errors for experimentally relevant scenarios (see Figs. 3 and 4).

In this Letter, we report theoretical progress in dynamically correcting errors stemming from fluctuations in the magnetic field gradient in the singlet-triplet spin qubit system. These errors are not amenable to correction via the numerous quantum control techniques developed in other fields, such as NMR, since in the present case the experimenter has precise control only over the rotation rate about the z-axis of the Bloch sphere, and this rate is furthermore restricted to be positive and bounded. Despite these strong constraints, we construct simple electrical pulse sequences that, for small gradients, carry out rotations about the z-axis while canceling errors up to the sixth order in the gradient fluctuations, and for large gradients, carry out arbitrary rotations while canceling the leading order error. This represents an important step forward in the development of singlet-triplet qubits as viable resources for quantum computing.

We consider the Hamiltonian governing the singlet-triplet qubit,

$$H(t) = \frac{h}{2}\sigma_x + \frac{J(t)}{2}\sigma_z, \tag{1}$$

with constraints on the parameters imposed to account for the physical realities of the experiments[5,6,12,13,17–19]. Here $h = g\mu_B \Delta B$ and fluctuations in ΔB are much slower than typical gate times so that $h = h_0 + \delta h$ with h_0 a known constant and δh a random, unknown constant. (T_2^* is inversely proportional to the width of the statistical distribution from which δh is drawn.) The qubit is manipulated via the electrically controlled exchange cou-

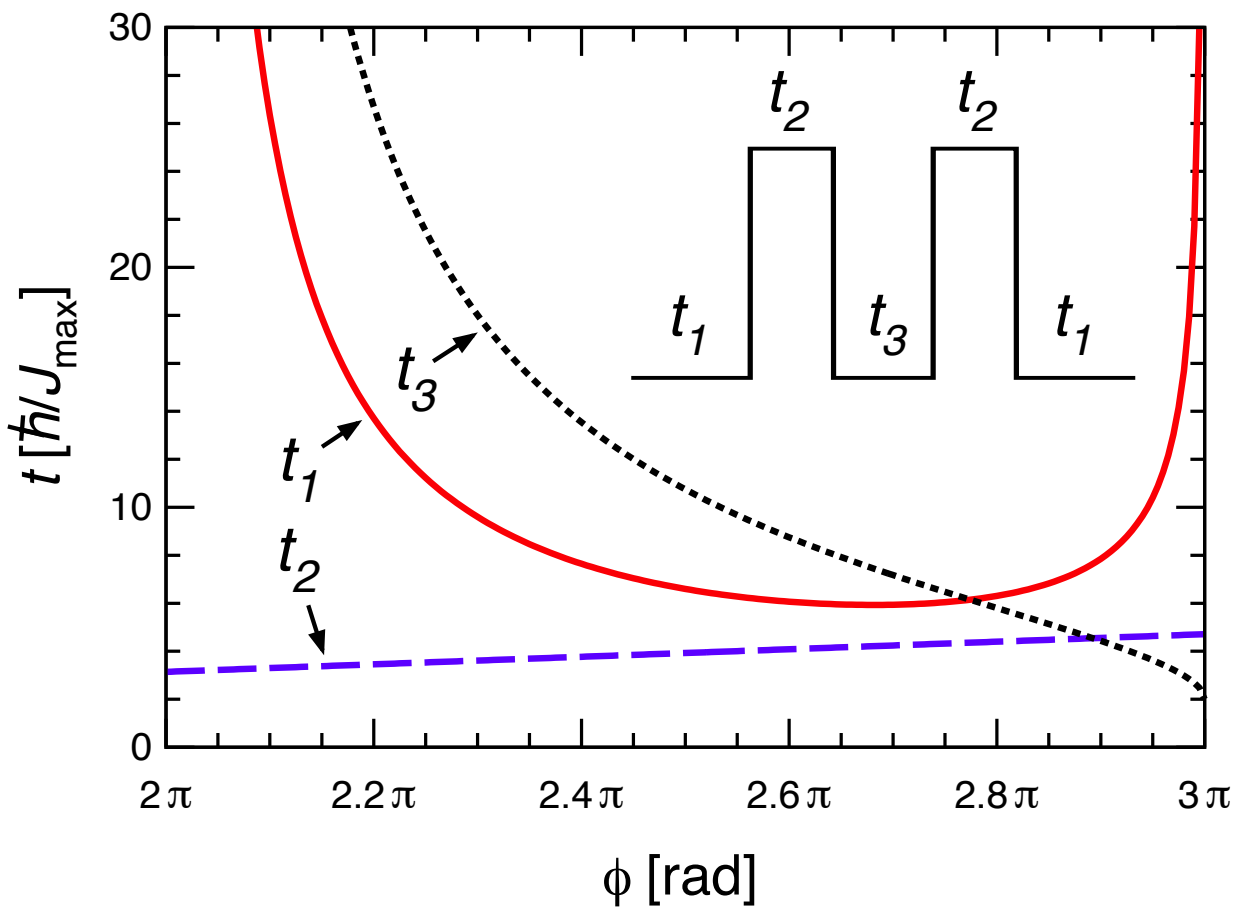

FIG. 1: (Color online.) Example of the five-piece SUPCODE pulse canceling gate error up to the fourth order in δh for $h_0 = 0$. The inset shows a schematic profile of such a pulse as a function of time. The time duration of each piece is denoted by t_1, t_2, and t_3. In the main panel we show the values of t_1 (red solid line), t_2 (blue dashed line), and t_3 (black dotted line) as functions of the rotation angle ϕ.

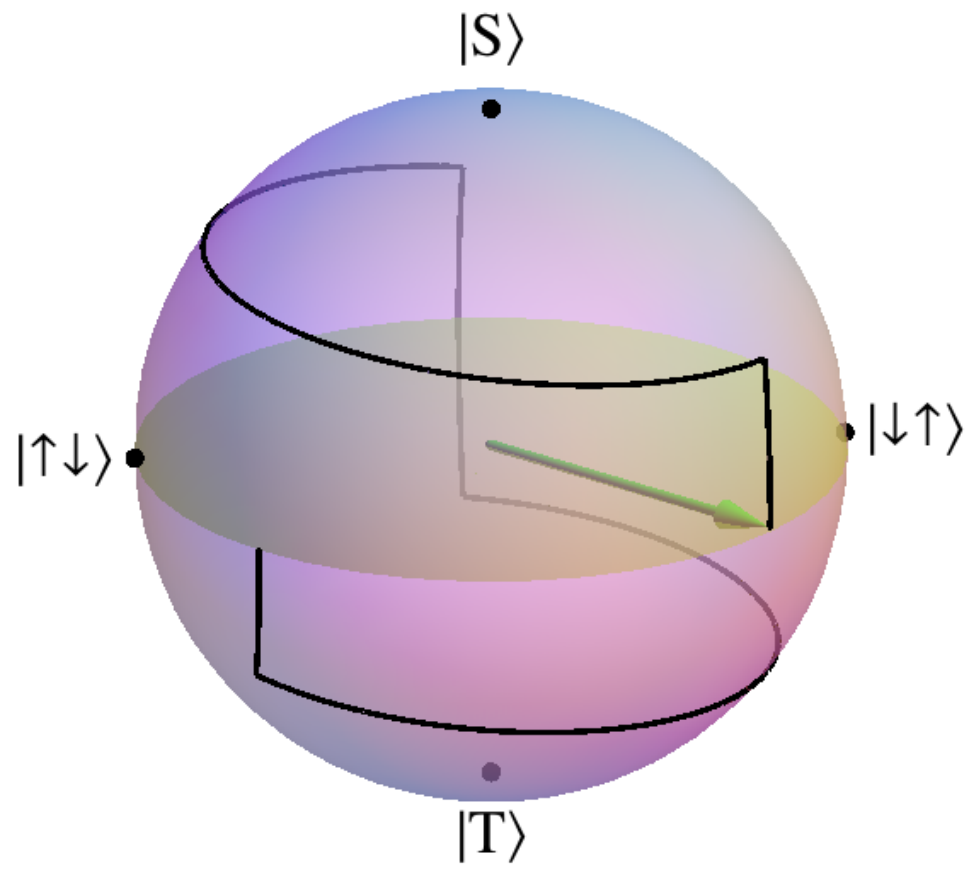

FIG. 2: (Color online.) Example of evolution of a given state on the Bloch sphere under the five-piece rotation by $\pi/2$ about $\hat{z}$. Here $h_0 = 0$ and for the purpose of illustration we have taken $\delta h/J_{\max} = 0.05$.

pling, $J(t)$, which is constrained to be positive (except in very high magnetic fields, when it is always negative) and is restricted in magnitude by the fact that as it is increased by tilting the double dot potential, the qubit information starts to transfer from the spin state into the charge state of the double dot and is hence subject to rapid decoherence due to electrical noise, so that one must impose a limit, $0 \leq J(t) \leq J_{\max}$. The constraint to positive rotations is also relevant to exchange-only coded qubits[20–22].

Our goal is to design a pulse in $J(t)$ that respects these constraints and performs a given rotation in a way that is insensitive to δh. We dub the resulting composite pulse sequence SUPCODE: Soft Uniaxial Positive Control for Orthogonal Drift Error. We emphasize that although the singlet-triplet qubit is one of the most experimentally advanced paths towards a scalable quantum computer, the restricted control available does not permit application of some elegant methods of quantum control developed recently. In particular, the positivity of $J(t)$ precludes the prescriptions of Refs. 14,16, and while later related work incorporates a positivity constraint[15], it is nonetheless precluded by the lack of real-time control over h. Below we consider two cases: $h_0 = 0$, which is directly relevant to experiments with unpumped nuclear spins and no micromagnet[5,18] where only rotations about the z-axis are desired (*e.g.*, for spin echo), and $h_0 \sim J_{\max}$, which is directly relevant to experiments with pumped nuclear spins[6] or a nearby micromagnet[7] where full single-qubit control is desired.

For $h_0 = 0$, we assume for simplicity that the pulse is of a binary form where $J(t)$ alternates between its extremal values of 0 and $J_{\max}$. Expanding the evolution operator of the system, $U(T) = \mathcal{T}\left\{\exp\left[-i\int_0^T dt H(t)\right]\right\}$, in powers of $\delta h/J_{\max}$, we choose the time duration of each segment such that the zeroth order term is a rotation about $\hat{z}$ by the desired angle and one or more successively higher order terms vanish. Details are given in the Supplementary Information, where we also rigorously show that there is no pulse which cancels all higher orders for finite $J_{\max}$. Thus, we find three-, five-, seven-, and nine-piece SUPCODE pulses that perform arbitrary rotations about $\hat{z}$ while canceling undesired terms up to the first, second, second, and third order in $\delta h/J_{\max}$, respectively. An example of the five-piece SUPCODE pulse, which cancels first and second order terms in $\delta h/J_{\max}$ in the evolution operator (corresponding to second and fourth order terms in the gate error), is shown in Fig. 1. Figure 2 traces the evolution of a particular initial state on the Bloch sphere under a five-piece SUPCODE pulse designed to perform a $\pi/2$ rotation about $\hat{z}$.

We define the average error per gate, Δ, as

$$\Delta = 1 - \overline{|\langle\psi_i|V^\dagger U(T_f)|\psi_i\rangle|^2} \tag{2}$$

where V is the desired operation, $U(T_f)$ is the actual evolution operator under the composite pulse of duration T_f, and the overlap is averaged over initial states $|\psi_i\rangle$ distributed uniformly over the Bloch sphere. Figure 3 shows the average error per gate for the naïve one-piece pulse and the SUPCODE pulses introduced above. We see that for $\delta h/J_{\max} < 10\%$ the SUPCODE pulses have markedly less error. This range is relevant to recent landmark experiments with GaAs[13] and silicon-based[18] double quantum dots. In the former $\delta h \sim 8$neV and in the latter $\delta h \sim 3$neV while for both $J_{\max}$ could be sev-

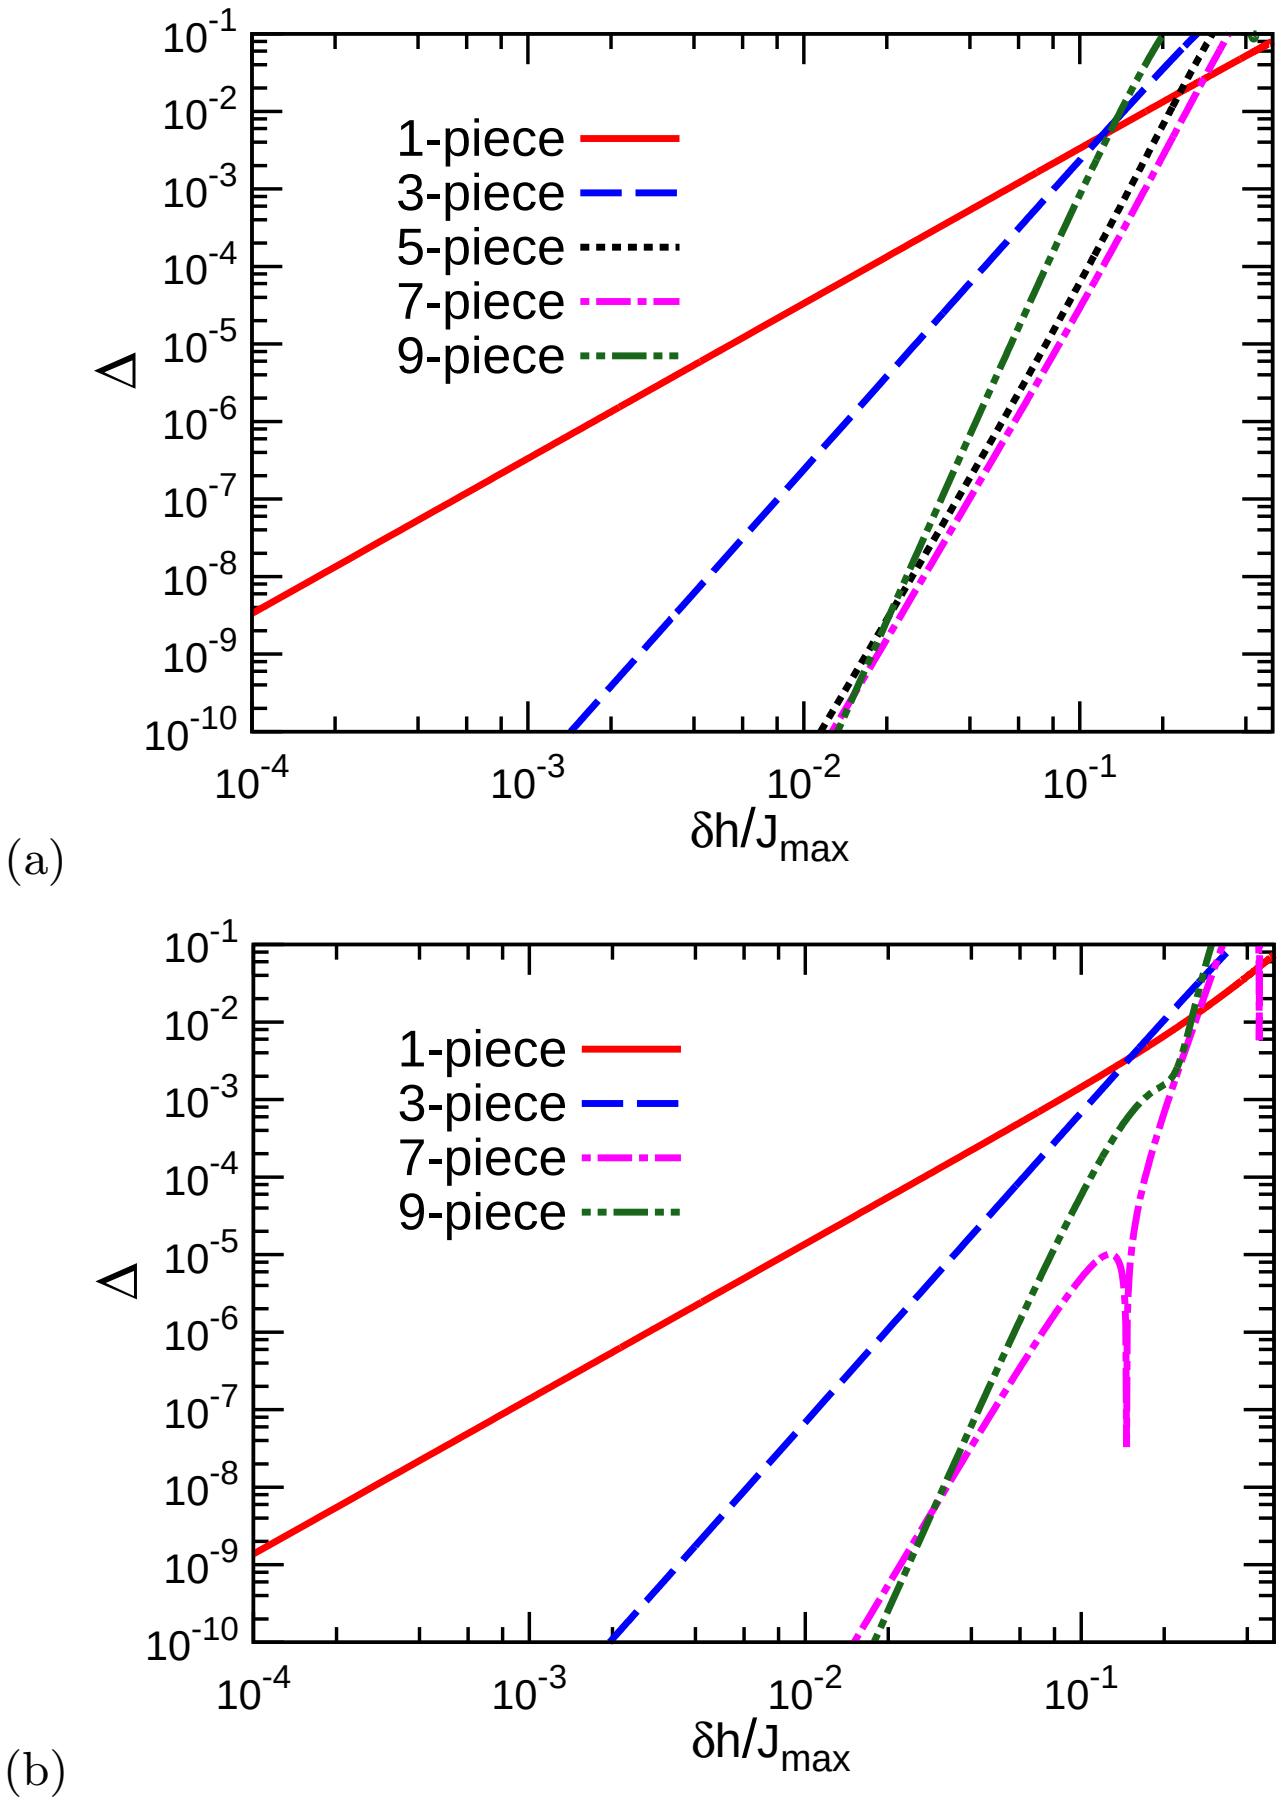

FIG. 3: (Color online.) Average error per gate for SUPCODE pulses at $h_0 = 0$. These figures show the average error per gate (defined in the main text) as functions of $\delta h/J_{\max}$ for the rotation around the z-axis by (a) $\phi_0 = \pi/2$ and (b) $\phi_0 = 1.7\pi$. The "1-piece" curve is for the uncorrected pulse with quadratic leading order errors in δh. The "3-piece," "5-piece," "7-piece," and "9-piece" curves are for the three-, five-, seven-, and nine-piece pulse sequences that cancels gate error up through second, fourth, fourth, and sixth order in δh, respectively. For details of the pulses, see the Supplementary Information.

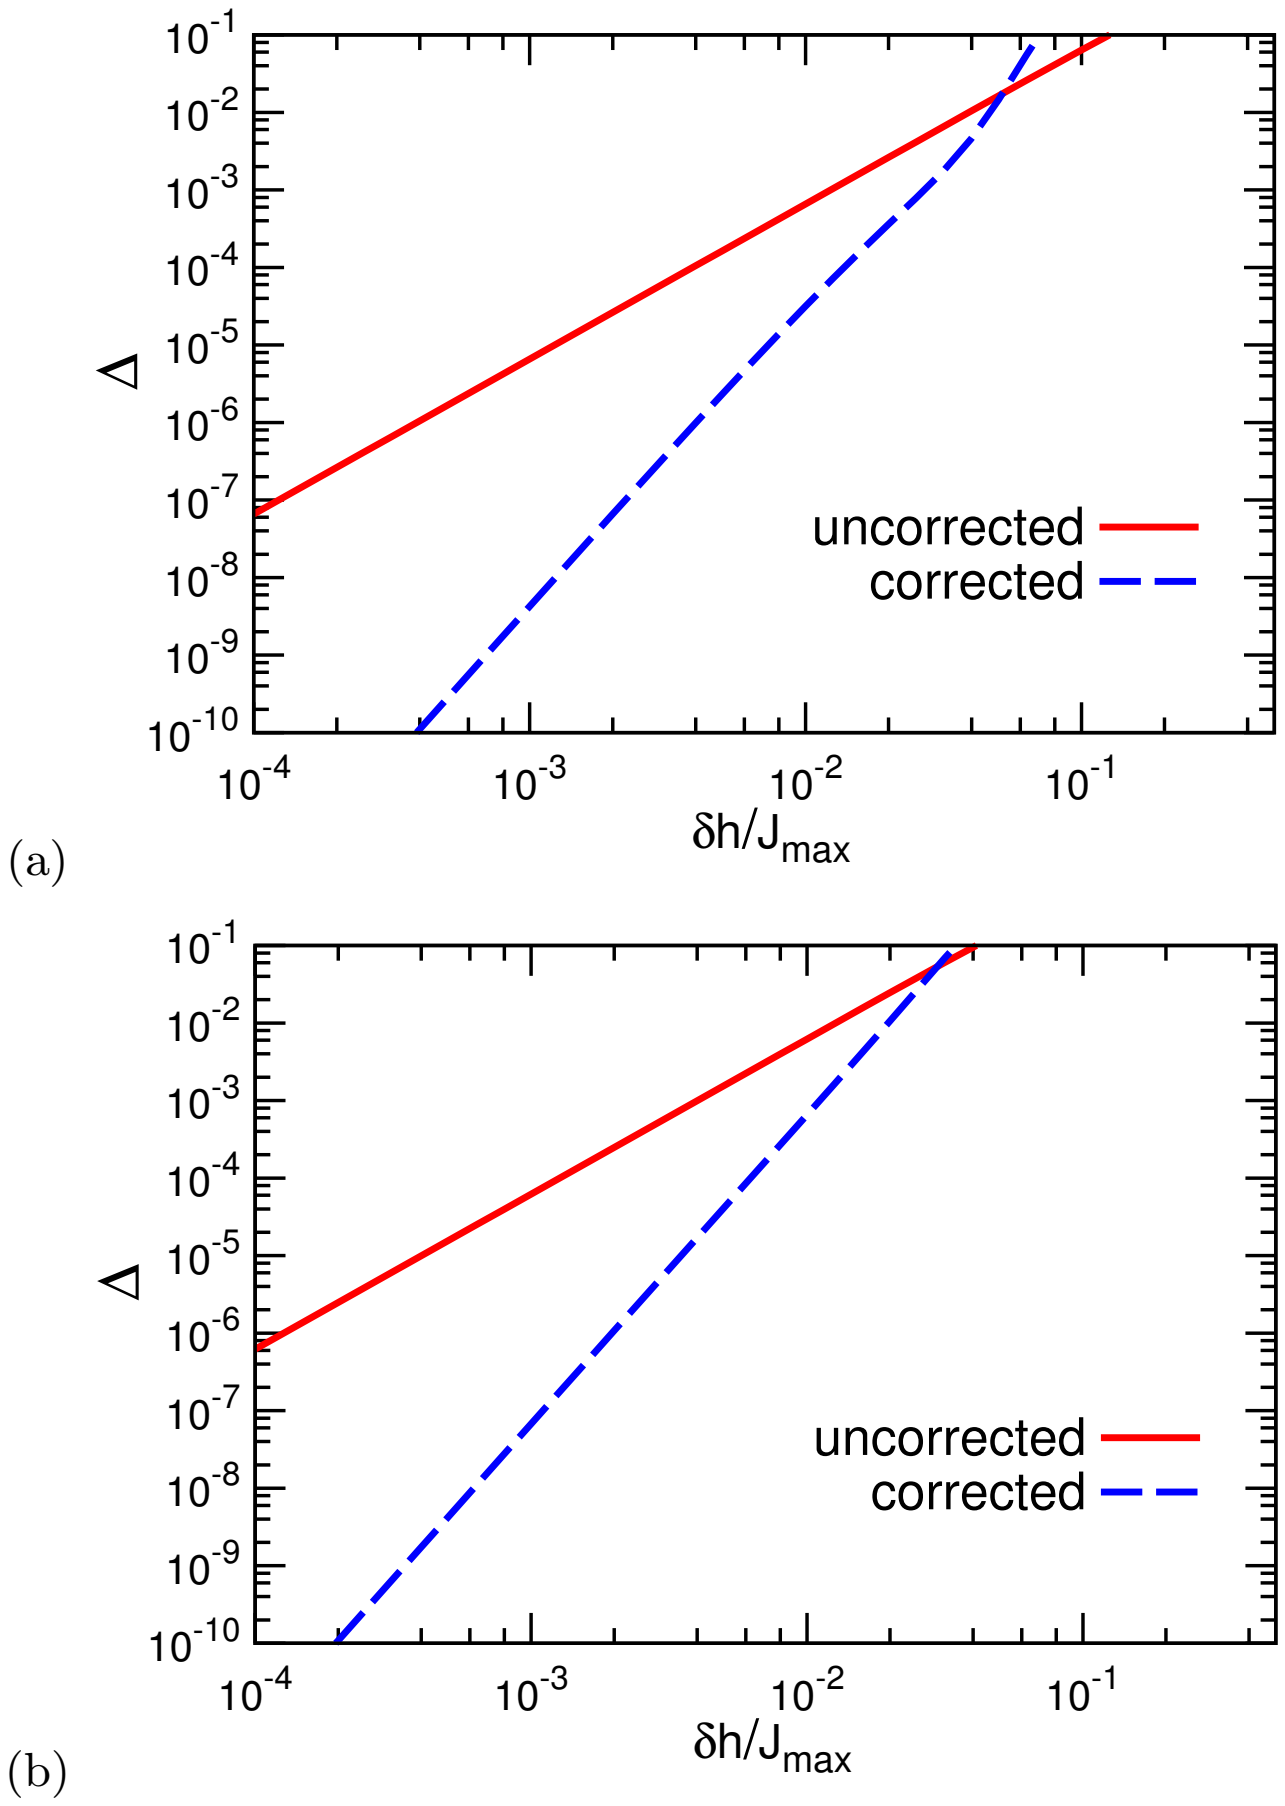

FIG. 4: (Color online.) Average error per gate for SUPCODE pulse at $h_0/J_{\max} = 0.25$. This set of figures shows the average error per gate (defined in the main text) as functions of $\delta h/J_{\max}$, for rotations by $\pi/2$ about the (a) x-axis and (b) z-axis. The corrected pulses cancel the leading order error.

eral hundred neV. We also see that although the leading order of the error for the nine-piece pulse is higher than that of the other pulses, its coefficient is large enough that for $\delta h/J_{\max} \gtrsim 2\%$, it is better to use the five- or seven-piece pulses. This suggests that generating similar pulses with even more pieces likely will not extend the range of values of δh for which low-error rotations are possible.

For $h_0 \sim J_{\max}$, the noncommutation of the Hamiltonian at different times even for $\delta h = 0$ makes the previous approach algebraically forbidding. However, in this case we have the possibility to perform rotations about axes $\hat{r}$ other than $\hat{z}$. We make use of this freedom in order to construct SUPCODE pulses in a simple way: We first take an uncorrected (i.e., designed as if $\delta h = 0$) rotation $\tilde{R}(\hat{r};\phi)$ and then construct an uncorrected identity operation $\tilde{I}(\hat{r};\phi)$ designed such that the error in its implementation exactly cancels the leading order error in the original rotation. We represent the uncorrected rotations $\tilde{R}(\hat{r};\phi)$ in terms of ideal rotations $R(\hat{r};\phi)$ as

$$\tilde{R}(\hat{r};\phi) = R(\hat{r};\phi)\big(I + \delta h\, A(\hat{r};\phi) + \mathcal{O}(\delta h)^2\big) \tag{3}$$

and

$$\tilde{I}(\hat{r};\phi) = I + \delta h\, B(\hat{r};\phi) + \mathcal{O}(\delta h)^2, \tag{4}$$

where $A(\hat{r};\phi)$ and $B(\hat{r};\phi)$ are the first order corrections. For the corrected pulse $\tilde{R}\tilde{I} = R\big(I + \delta h(A+B) + \mathcal{O}(\delta h)^2\big)$, it is clear that we want to make $A(\hat{r};\phi) + B(\hat{r};\phi) = 0$. Because there are infinitely many ways to realize the identity operation, there is sufficient freedom to engineer such a cancelation. For example, we consider a product of parameterized forms of the identity such as

$$\begin{aligned}\tilde{I}_1(a_i, b_i) = {}& \tilde{R}(h_0\hat{x} + b_i J_{\max}\hat{z}; 2\pi a_i)\cdot \tilde{R}(\hat{x}; 2\pi)\\ &\cdot \tilde{R}(h_0\hat{x} + b_i J_{\max}\hat{z}; 2\pi(1-a_i))\end{aligned} \tag{5}$$

and

$$\tilde{I}_2(a_i,b_i,n) = \tilde{R}(\hat{x};2\pi a_i)\cdot\tilde{R}(h_0\hat{x}+b_iJ_{\max}\hat{z};2n\pi) \cdot \tilde{R}(\hat{x};2\pi(1-a_i)), \tag{6}$$

where a_i and b_i are parameters satisfying $0 < a_i < 1$, $0 < b_i < 1$ and n is a positive integer.

As an explicit demonstration of SUPCODE, we show rotations around the x- and z-axes by arbitrary angles $0 < \phi < \pi$ for the particular case $J_{\max}/h_0 \simeq 4$. (Combinations of these are sufficient for universal one-qubit gates.) About $\hat{x}$, the uncorrected rotation is performed by holding $J = 0$ for a time ϕ/h_0, and this is preceded by the identity $\tilde{I} = \tilde{I}_1(1/2,b_1)^2\tilde{I}_2(1/2,b_2,15)$ where b_1 and b_2 are chosen such that errors cancel (see Supplementary Information). About $\hat{z}$, the uncorrected rotation is performed by a three-part pulse[23,24] $\tilde{R}(\hat{z};\phi) = \tilde{R}(\hat{x}+\hat{z};\pi)\tilde{R}(\hat{x};\phi)\tilde{R}(\hat{x}+\hat{z};\pi)$, and this is preceded by the identity $\tilde{I} = \tilde{I}_1(1/2,b_3)^3\tilde{I}_2(a,b_4,15)$ where a, b_3, and b_4 are chosen such that errors cancel (see Supplementary Information). As shown in Fig. 4 for $\phi = \pi/2$, SUPCODE does indeed lead to a higher-order scaling of the error in $\delta h/J_{\max}$ (and hence in $\hbar/J_{\max}T_2^*$), and a reduction of error when $\delta h/J_{\max}$ is less than a few percent. For instance, when $\delta h/J_{\max} = 1\%$, errors are typically reduced by an order of magnitude.

The tradeoff here is that SUPCODE rotations are typically over an order of magnitude longer than uncorrected rotations. We note that for a given experimental set of parameters one should try optimizing the pulse sequence, which we have not done for the arbitrarily-chosen example above, as both the length and error of the corrected pulses could certainly be reduced by a significant constant factor by searching over different constructions of the identity, $\tilde{I}$. Nonetheless, for experiments in GaAs systems with pumped nuclear spins[25] ($h_0 \sim 0.6\mu$eV, $\delta h \sim$ 30neV) or micromagnets[7] ($h_0 \sim$ 20neV, $\delta h \sim$ 1neV) the sequences shown here could already deliver substantial improvement over the uncorrected ones.

Realistic deviations from the ideal pulses assumed above would include charge noise, which adds a random quasi-static contribution to the exchange, and finite rise times. The former could be reduced by using a multi-electron variant of the singlet-triplet qubit[26] and, in principle, it may even be possible to dynamically correct by adding more degrees of freedom to the pulses. The latter could be compensated for by adjusting pulse parameters given the actual turn-on/off profiles of the pulse for a specific experimental setup. Thus, even in nonideal conditions SUPCODE could enable precise spin qubit rotations independent of shot-to-shot variation in the nuclear Overhauser field, also easing tasks such as ensemble-averaged measurements of singlet probability oscillations versus time by reducing hyperfine-induced decay. More importantly, this work allows satisfaction of the quantum error correction threshold within a substantially larger region of the physical parameter space than would otherwise be possible. The fact that T_2 has now reached tens of microseconds in GaAs quantum dots[13], and milliseconds[27] or even seconds in the presence of isotopic purification[28] in Si-based structures implies that gate errors are currently dominated not by dynamical fluctuations in the nuclear spin bath, but by the statistical distribution of the magnetic field gradient, and these errors may be efficiently suppressed by SUPCODE.

Acknowledgements: This work is supported by LPS-NSA-CMTC and IARPA-MQCO grants.

---

[1] M. Nielsen and I. Chuang, *Quantum Computation and Quantum Information* (Cambridge University Press, Cambridge, 2000).

[2] F. H. L. Koppens, C. Buizert, K. J. Tielrooij, I. T. Vink, K. C. Nowack, T. Meunier, L. P. Kouwenhoven, and L. M. K. Vandersypen, Nature **442**, 766 (2006).

[3] M. Pioro-Ladriere, T. Obata, Y. Tokura, Y.-S. Shin, T. Kubo, K. Yoshida, T. Taniyama, and S. Tarucha, Nature Phys. **4**, 776 (2008).

[4] J. Levy, Phys. Rev. Lett. **89**, 147902 (2002).

[5] J. Petta, A. Johnson, J. Taylor, E. Laird, A. Yacoby, M. Lukin, C. Marcus, M. Hanson, and A. Gossard, Science **309**, 2180 (2005).

[6] S. Foletti, H. Bluhm, D. Mahalu, V. Umansky, and A. Yacoby, Nature Phys. **5**, 903 (2009).

[7] R. Brunner, Y.-S. Shin, T. Obata, M. Pioro-Ladrière, T. Kubo, K. Yoshida, T. Taniyama, Y. Tokura, and S. Tarucha, Phys. Rev. Lett. **107**, 146801 (2011).

[8] D. J. Reilly, J. M. Taylor, E. A. Laird, J. R. Petta, C. M. Marcus, M. P. Hanson, and A. C. Gossard, Phys. Rev. Lett. **101**, 236803 (2008).

[9] L. Cywiński, W. M. Witzel, and S. Das Sarma, Phys. Rev. Lett. **102**, 057601 (2009).

[10] G. S. Uhrig, Phys. Rev. Lett. **98**, 100504 (2007).

[11] W. M. Witzel and S. Das Sarma, Phys. Rev. B **76**, 241303 (2007).

[12] C. Barthel, J. Medford, C. M. Marcus, M. P. Hanson, and A. C. Gossard, Phys. Rev. Lett. **105**, 266808 (2010).

[13] H. Bluhm, S. Foletti, I. Neder, M. Rudner, D. Mahalu, V. Umansky, and A. Yacoby, Nature Phys. **7**, 109 (2011).

[14] K. Khodjasteh and L. Viola, Phys. Rev. A **80**, 032314 (2009).

[15] K. Khodjasteh, D. A. Lidar, and L. Viola, Phys. Rev. Lett. **104**, 090501 (2010).

[16] M. D. Grace, J. Dominy, W. M. Witzel, and M. S. Carroll, arXiv:1105.2358 (2011).

[17] N. S. Lai, W. H. Lim, C. H. Yang, F. A. Zwanenburg, W. A. Coish, F. Qassemi, A. Morello, and A. S. Dzurak, Sci. Rep. **1**, 110 (2011).

[18] B. M. Maune, M. G. Borselli, B. Huang, T. D. Ladd, P. W. Deelman, K. S. Holabird, A. A. Kiselev, I. Alvarado-Rodriguez, R. S. Ross, A. E. Schmitz, et al., Nature **481**, 344 (2012).

[19] J. R. Prance, Z. Shi, C. B. Simmons, D. E. Savage, M. G.

Lagally, L. R. Schreiber, L. M. K. Vandersypen, M. Friesen, R. Joynt, S. N. Coppersmith, et al., Phys. Rev. Lett. **108**, 046808 (2012).

[20] D. P. DiVincenzo, D. Bacon, J. Kempe, G. Burkard, and K. B. Whaley, Nature **408**, 339 (2000).

[21] E. A. Laird, J. M. Taylor, D. P. DiVincenzo, C. M. Marcus, M. P. Hanson, and A. C. Gossard, Phys. Rev. B **82**, 075403 (2010).

[22] Z. Shi, C. B. Simmons, J. R. Prance, J. King Gamble, T. S. Koh, Y.-P. Shim, X. Hu, D. E. Savage, M. G. Lagally, M. A. Eriksson, et al., arXiv:1110.6622 (2011).

[23] R. Hanson and G. Burkard, Phys. Rev. Lett. **98**, 050502 (2007).

[24] G. Ramon, Phys. Rev. B **84**, 155329 (2011).

[25] H. Bluhm, S. Foletti, D. Mahalu, V. Umansky, and A. Yacoby, Phys. Rev. Lett. **105**, 216803 (2010).

[26] E. Barnes, J. P. Kestner, N. T. T. Nguyen, and S. Das Sarma, Phys. Rev. B **84**, 235309 (2011).

[27] W. M. Witzel, M. S. Carroll, A. Morello, L. Cywiński, and S. Das Sarma, Phys. Rev. Lett. **105**, 187602 (2010).

[28] A. M. Tyryshkin, S. Tojo, J. J. L. Morton, H. Riemann, N. V. Abrosimov, P. Becker, H.-J. Pohl, T. Schenkel, M. L. W. Thewalt, K. M. Itoh, et al., Nature Mater. **11**, 143 (2011).

Supplementary material

In this supplementary material we provide detailed information related to the results shown in our main article "Composite pulses for robust universal control of singlet-triplet qubits". In Sec. I we give details of the expansion of the evolution operator with respect to fluctuations in the magnetic field gradient δh, in the vicinity of $h_0 = 0$. Using these results we present, in Sec. II, a no-go theorem that no pulse sequence with a finite exchange interaction can be found to cancel all orders of error due to δh. In Sec. III we show explicit forms of piecewise pulse sequences that, for $h_0 = 0$, cancels error due to δh up to first, second and the third order in the evolution operator (which amounts to second, fourth and sixth order in the error per gate). In Sec. IV, we show the pulse sequences that for $h_0 \neq 0$ carry out $\hat{x}$ and $\hat{z}$ rotations while canceling the leading order error in δh.

I. EXPANSION OF h AROUND $h_0 = 0$

We start with the evolution operator defined in the main text

$$U\left(T,0\right) = \mathcal{T}\left\{\exp\left[-i\int_0^T dt\left(\frac{h}{2}\sigma_x + \frac{J(t)}{2}\sigma_z\right)\right]\right\}, \tag{S-1}$$

with

$$h = h_0 + \delta h. \tag{S-2}$$

Expanding the evolution operator in powers of δh in the vicinity of $h_0 = 0$,

$$U\left(T,0\right) = \sum_{n=0}^{\infty} \delta h^n \Pi_n, \tag{S-3}$$

one can show that

$$\Pi_n = \left(-\frac{i}{2}\right)^n \left(\prod_{m=n}^{1}\int_0^{t'_{m+1}} dt'_m\right)\left\{\cos\left[\frac{f\left(\tau\right)}{2} - \sum_{k=1}^{n}\left(-1\right)^{k-n} f\left(t'_k\right)\right] A_n + \sin\left[\frac{f\left(\tau\right)}{2} - \sum_{k=1}^{n}\left(-1\right)^{k-n} f\left(t'_k\right)\right] B_n\right\}, \tag{S-4}$$

(note that the product is in descending order in observance of the time-ordering of operators) where

$$t'_{n+1} \equiv T, \tag{S-5}$$

$$f(T) = \int_0^T dt J(t), \tag{S-6}$$

$$A_n \equiv \begin{cases} I & n \text{ even} \\ \sigma_x & n \text{ odd} \end{cases}, \qquad B_n \equiv \begin{cases} -i\sigma_z & n \text{ even} \\ \sigma_y & n \text{ odd} \end{cases}, \tag{S-7}$$

and I is the 2×2 identity matrix and σ_x, σ_y, and σ_z are Pauli matrices.

Thus, for the nth-order term to vanish, one must have

$$\left(\prod_{m=n}^{1} \int_0^{t'_{m+1}} dt'_m\right) \exp\left[i \sum_{k=1}^{n} (-1)^k f(t_k)\right] = 0. \tag{S-8}$$

II. NO-GO THEOREM FOR CANCELING ERROR TO ALL ORDERS

In this section we show that there does not exist a pulse sequence with a bounded exchange interaction that suppresses all orders of error due to δh.

Consider a function

$$\psi(T,\lambda) = 1 + \sum_{n=1}^{\infty} \lambda^n \left(\prod_{m=n}^{1} \int_0^{t'_{m+1}} dt'_m\right) \exp\left[i \sum_{k=1}^{n} (-1)^k f(t_k)\right] \tag{S-9}$$

$$= 1 + \lambda \int_0^T dt'_1 \exp\left[-if(t'_1)\right] + \lambda^2 \int_0^T dt'_2 \int_0^{t'_2} dt'_1 \exp\left[-if(t'_2) + if(t'_1)\right] \tag{S-10}$$

$$+ \lambda^3 \int_0^T dt'_3 \int_0^{t'_3} dt'_2 \int_0^{t'_2} dt'_1 \exp\left[-if(t'_3) + if(t'_2) - if(t'_1)\right] + \cdots \tag{S-11}$$

which solves the partial differential equation

$$\frac{\partial \psi}{\partial T} = \lambda \exp\left[-if(T)\right] \psi^*, \tag{S-12}$$

with boundary condition

$$\psi(T=0,\lambda) = 1. \tag{S-13}$$

Observe that if we can find a pulse which cancels all orders in Eq. (S-8) at $T = T_f$, it means that Eq. (S-12) has a solution that also satisfies $\psi(T = T_f, \lambda) = 1$ for any λ. To simplify the problem further, we write

$$\psi(T,\lambda) = \exp\left[-i\frac{f(T)}{2}\right] \exp\left[u(T,\lambda) - i\frac{w(T,\lambda)}{2}\right], \tag{S-14}$$

where $u(T,\lambda)$ and $w(T,\lambda)$ are real functions satisfying

$$\frac{\partial u(T,\lambda)}{\partial T} = \lambda \cos w(T,\lambda), \tag{S-15}$$

$$\frac{\partial w(T,\lambda)}{\partial T} = -2\lambda \sin w(T,\lambda) - J(T). \tag{S-16}$$

The associated boundary conditions are

$$u(T=0,\lambda) = 0, \tag{S-17}$$

$$u(T=T_f,\lambda) = \lambda \int_0^{T_f} dT' \cos w(T',\lambda) = 0, \tag{S-18}$$

$$w(T=0,\lambda) = 0, \tag{S-19}$$

$$w(T=T_f,\lambda) = -f(T_f). \tag{S-20}$$

We focus on Eqs. (S-16), (S-18)-(S-20) only and consider the limit $\lambda \to \infty$. It is clear from Eq. (S-16) that $w(T,\lambda)$ exists in this limit and is given by

$$w = \pi n - \frac{J(T)}{2\lambda} + \mathcal{O}(\frac{1}{\lambda^2}), \tag{S-21}$$

where n is an integer. To satisfy the boundary condition in Eq. (S-19), we need $n = 0$ and $J(0) = 0$. To satisfy Eq. (S-20), we must have

$$w(T_f,\lambda) = -\frac{J(T_f)}{2\lambda} = -f(T_f), \tag{S-22}$$

which in turn requires $J(T_f) = f(T_f) = 0$. This already negates the possibility of performing any nontrivial ($f(T_f) \neq 0$) z-rotation. However even error-free trivial rotations are impossible when the final condition, Eq. (S-18), is taken into account since this immediately gives $T_f = 0$. We conclude that it is impossible to design a $J(t)$ that cancels field gradient errors to all orders. In reaching this conclusion, we have implicitly assumed that $J(t)$ is bounded and $T_f < \infty$.

III. PIECEWISE PULSE SEQUENCES FOR $h_0 = 0$

The no-go theorem shown in Sec. II implies that it is instructive to design pulses which cancel successive orders. In this work we focus on the piecewise constant pulse, which can be expressed as

$$U\left(T_f,0\right) = \prod_{k=N}^{1} \exp\left[-i\left(\frac{\delta h}{2}\sigma_x + \frac{J_k}{2}\sigma_z\right)\frac{\tau_k}{J_{\max}}\right], \tag{S-23}$$

where we have defined the dimensionless quantity $\tau_k = J_{\max} t_k$ for convenience.

Let us also define some simplifying notations. t_k refers to the duration of a pulse on the k^{th} piece. The total duration of time after the k^{th} piece would be

$$T_k = \sum_{j=1}^{k} t_j, \tag{S-24}$$

with $T_0 \equiv 0$ and $T_N \equiv T_f$ indicating the initial and final time. $J(t)$ can be expressed as

$$J(t) = \sum_{k=1}^{N} J_k \Theta(t - T_{k-1})\Theta(T_k - t), \tag{S-25}$$

where $\Theta(t)$ is the Heaviside step function.

The motivation is to cancel successive orders of δh in the expansion with number of pieces N as small as possible. We will impose further constraints to simplify the search: First, we only allow $0 \leq J_k \leq J_{\max}$. The non-negativity of this prescription ensures that the designed pulse is relevant to experiments on singlet-triplet qubits. Second, we consider symmetric pulses, i.e., $J(t) = J(T_f - t)$, in this section. This ensures that $U(T_f, 0)$ has no σ_y component[1].

A. Three-piece pulse sequence

One of the simplest ways to cancel the leading order error with strictly positive values of J is via a three-piece pulse sequence. In Eq. (S-23) we take $N = 3$ and the three-piece pulse sequence can be characterized by

$$(\tau_1, J_1) = (\tau_3, J_3) = (\phi_0, J_{\max});\ (\tau_2, J_2) = (4\pi - 2\phi_0, J_{\max}/2), \tag{S-26}$$

where ϕ_0 is the desired rotation angle around the z-axis. It is straightforward to verify that the evolution operator under this pulse is

$$U(T_f, 0) = -\exp\left(-i\frac{\phi_0}{2}\sigma_z\right) + \frac{\delta h^2}{2J_{\max}^2}\left(4\pi - \phi_0 + \sin\phi_0\right)\left(\sin\frac{\phi_0}{2}I + i\cos\frac{\phi_0}{2}\sigma_z\right) + \mathcal{O}\Big[\Big(\frac{\delta h}{J_{\max}}\Big)^3\Big]. \tag{S-27}$$

Here the deviation from the desired rotation has been suppressed up to second order in δh. Note that this pulse actually sweeps the Bloch vector through an angle $\phi = 2\pi + \phi_0$, which is the origin of the trivial additional phase factor. It is clear that in order to achieve error cancellation, the Bloch vector generally must be swept through more than 2π about the z-axis since its path is deflected from the ideal ($\delta h = 0$) path in opposite directions in the "eastern and western hemispheres." [One can also explicitly show the necessity of larger angles from Eq. (S-4).] Thus the three-piece pulse sequence cancels leading order error simply by ensuring that, in the absence of δh, the Bloch vector spends an equal amount of time in each hemisphere during its rotation. In this section, we will use ϕ_0 to denote the "desired" rotation angle, and ϕ the "actual" rotation angle, where ϕ is larger than ϕ_0 by a multiple of 2π.

B. Five-piece pulse sequence

In this subsection we set $N = 5$ in Eq. (S-23), which allows us cancel the dependence of $U(T_f, 0)$ on δh up to the second order, using a symmetric pulse with parameters $\tau_1 = \tau_5$, $\tau_2 = \tau_4 = \phi/4$, $J_1 = J_3 = J_5 = 0$, $J_2 = J_4 = J_{\max}$. We expand $U(T_f, 0)$ as

$$\begin{aligned} U(T_f,0) = &\Big(\cos\frac{\phi}{2}I - i\sin\frac{\phi}{2}\sigma_z\Big) - i\frac{\delta h}{2J_{\max}}\Big(\tau_3 + 2\tau_1\cos\frac{\phi}{2} + 2\sin\frac{\phi}{2}\Big)\sigma_x \\ &- \frac{\delta h^2}{8J_{\max}^2}\left\{\Big[4\tau_1\tau_3 + (4\tau_1^2+\tau_3^2)\cos\frac{\phi}{2} + 2(4\tau_1 + 2\tau_3 + \phi)\sin\frac{\phi}{2}\Big]I - i\Big[4\tau_3 - 2(2\tau_3+\phi)\cos\frac{\phi}{2} + (4+\tau_3^2)\sin\frac{\phi}{2}\Big]\sigma_z\right\} \\ &+ \mathcal{O}\Big[\Big(\frac{\delta h}{J_{\max}}\Big)^3\Big]. \end{aligned} \tag{S-28}$$

To make the first order coefficient vanish, one must choose

$$\tau_3 = -2\left(\tau_1\cos\frac{\phi}{2} + \sin\frac{\phi}{2}\right). \tag{S-29}$$

Plugging Eq. (S-29) into Eq. (S-28), it suffices to satisfy

$$-2\tau_1 - \phi + 4\tau_1\cos\frac{\phi}{2} - 2\tau_1\cos\phi + 4\sin\frac{\phi}{2} + (\tau_1^2 - 1)\sin\phi = 0 \tag{S-30}$$

to make the second order terms vanish. We choose a root that is positive for $2\pi < \phi < 3\pi$, that is

$$\tau_1 = \csc\phi\left(1 - 2\cos\frac{\phi}{2} + \cos\phi + \sqrt{4 - 8\cos\frac{\phi}{2} + 4\cos\phi + \phi\sin\phi}\right). \tag{S-31}$$

To summarize, to achieve a $R(\hat{z};\phi)$ rotation while canceling the dependence of $U(T_f, 0)$ on δh up to the second order, we should choose the pulse parameters as

$$\tau_5 = \tau_1 = \csc\phi\left(1 - 2\cos\frac{\phi}{2} + \cos\phi + \sqrt{4 - 8\cos\frac{\phi}{2} + 4\cos\phi + \phi\sin\phi}\right), \tag{S-32}$$

$$\tau_4 = \tau_2 = \phi/2, \tag{S-33}$$

$$\tau_3 = -2\left(\tau_1\cos\frac{\phi}{2} + \sin\frac{\phi}{2}\right). \tag{S-34}$$

A plot of these parameters as a function of ϕ is given in Fig SI1. Note that this pulse is defined for $\phi \in (2\pi, 3\pi)$, which is equivalent to a rotation $R(\hat{z};\phi_0)$ with $\phi_0 \in (0,\pi)$. Rotation of angles outside the range $(0,\pi)$ may be achieved by duplicating existing pulse sequences. For example, to achieve a $\hat{z}$-rotation of $\phi_0 = 1.2\pi$ one could apply twice the $\phi_0 = 0.6\pi$ (corresponding to $\phi = 2.6\pi$) rotation.

As $\phi \to 2\pi$, $\tau_1 \to \infty$, $\tau_2 = \pi/2$, $\tau_3 \to 2\tau_1$. If we want to fix the total duration of the sequence, we let $J_{\max} \to \infty$. The pulse sequence becomes the CPMG pulse[3]. This is no surprise. In this case, it can indeed be shown that for a pair of instantaneous π pulses, setting leading order errors to zero while maintaining the time-reversal symmetry of the pulse sequence enforces the Uhrig condition[2].

C. Seven-piece pulse sequence

In Eq. (S-23) we take $N = 7$ and $\tau_1 = \tau_7$, $\tau_2 = \tau_4 = \tau_6 = \phi/3$, $\tau_3 = \tau_5$, $J_1 = J_3 = J_5 = J_7 = 0$, $J_2 = J_4 = J_6 = J_{\max}$. Since the number of independent variables are the same as for the five-piece pulse, it can still cancel the dependence of $U(T_f, 0)$ on δh up to second order, but not to third order. However, it will expand the range of rotation angles for

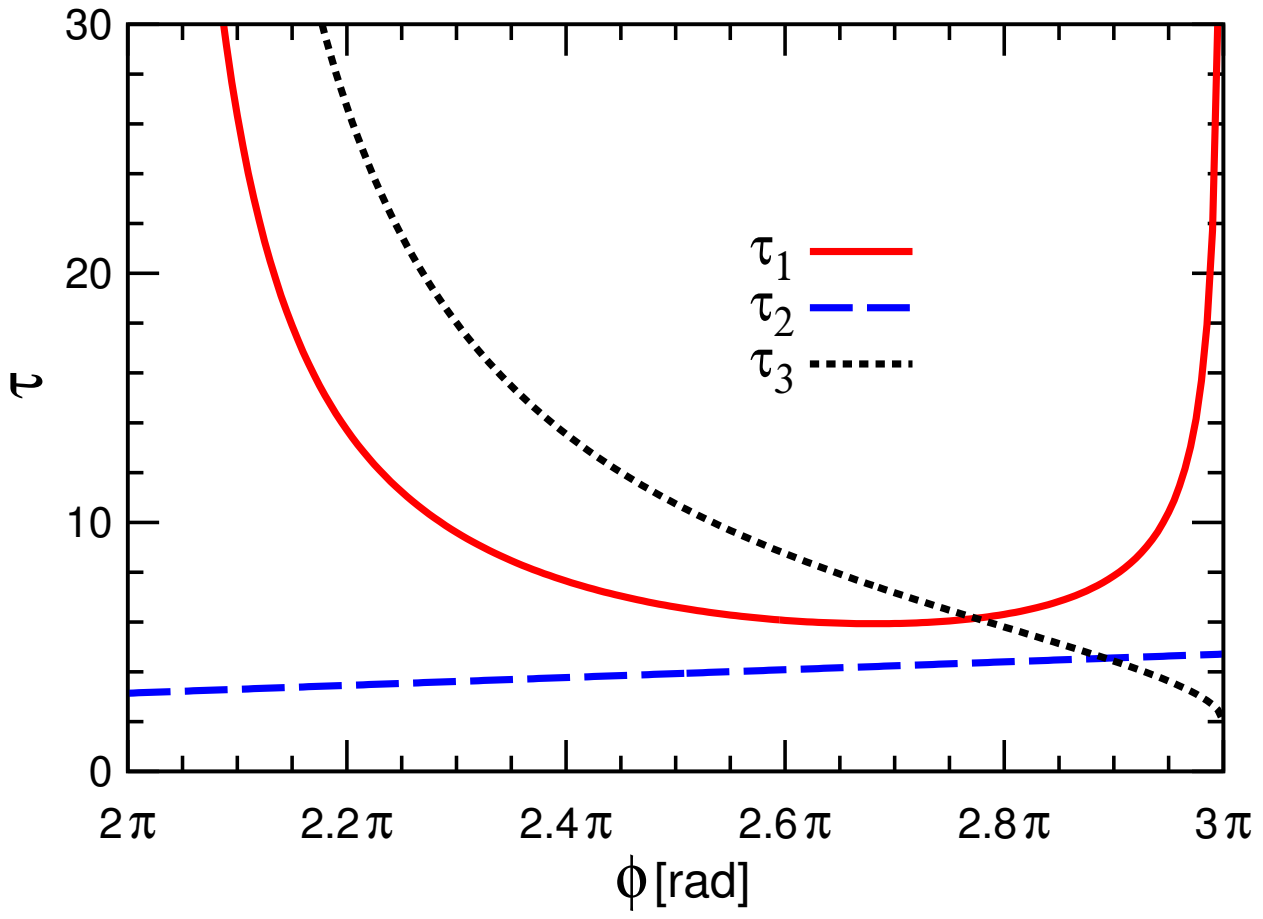

FIG. SI1: Parameters for the five-piece pulse as defined in Sec. III B.

which the pulse can directly be applied. We expand $U(T_f,0)$ as

$$\begin{aligned} U(T_f,0) = {} & \Big(\cos\frac{\phi}{2}I - i\sin\frac{\phi}{2}\sigma_z\Big) - i\frac{\delta h}{J_{\max}}\Big(\tau_3\cos\frac{\phi}{6} + \tau_1\cos\frac{\phi}{2} + \sin\frac{\phi}{2}\Big)\sigma_x \\ & - \frac{\delta h^2}{4J_{\max}^2}\Bigg\{\Big[\tau_3(4\tau_1+\tau_3)\cos\frac{\phi}{6} + (2\tau_1^2+\tau_3^2)\cos\frac{\phi}{2} + (\phi+4\tau_1+4\tau_3)\sin\frac{\phi}{2}\Big]I \\ & \qquad - i\Bigg[4\tau_3\cos\frac{\phi}{6} - (4\tau_3+\phi)\cos\frac{\phi}{2} + \tau_3^2\sin\frac{\phi}{6} + (\tau_3^2+2)\sin\frac{\phi}{2}\Bigg]\sigma_z\Bigg\} \\ & + \mathcal{O}\Big[\Big(\frac{\delta h}{J_{\max}}\Big)^3\Big]. \end{aligned} \tag{S-35}$$

Similar to the previous section, to make the first order coefficient vanish, one must choose

$$\tau_3 = -\sec\frac{\phi}{6}\Big(\tau_1\cos\frac{\phi}{2} + \sin\frac{\phi}{2}\Big). \tag{S-36}$$

Plugging Eq. (S-36) into Eq. (S-35), it suffices to satisfy

$$8\cos\frac{\phi}{6} - 6\cos\frac{\phi}{2} - (\tau_1^2-5)\cos\frac{5\phi}{6} + (\tau_1^2-1)\cos\frac{7\phi}{6} - 6\sec\frac{\phi}{6} + \Bigg[8\tau_1 + \phi + 4\tau_1\Big(\cos\frac{2\phi}{3} - 3\cos\frac{\phi}{3}\Big)\Bigg]\sin\frac{\phi}{2} = 0 \tag{S-37}$$

to make the second order terms vanish. We choose a root that is positive for $3\pi < \phi < 5\pi$, that is

$$\tau_1 = \frac{2\cos\frac{\phi}{2} - \cos\frac{\phi}{6} - \cos\frac{5\phi}{6} + 2\sqrt{\cos^2\frac{\phi}{6}\left(\phi\cos\frac{\phi}{6} - 6\sin\frac{\phi}{6}\right)\left(\sin\frac{\phi}{2} - 2\sin\frac{\phi}{6}\right)}}{\sin\frac{\phi}{6} - \sin\frac{5\phi}{6}}. \tag{S-38}$$

To summarize, to achieve a $R(\hat{z};\phi)$ rotation while canceling the dependence of $U(T_f,0)$ on δh up to second order, we should choose the pulse parameters as

$$\tau_7 = \tau_1 = \frac{2\cos\frac{\phi}{2} - \cos\frac{\phi}{6} - \cos\frac{5\phi}{6} + 2\sqrt{\cos^2\frac{\phi}{6}\left(\phi\cos\frac{\phi}{6} - 6\sin\frac{\phi}{6}\right)\left(\sin\frac{\phi}{2} - 2\sin\frac{\phi}{6}\right)}}{\sin\frac{\phi}{6} - \sin\frac{5\phi}{6}}, \tag{S-39}$$

$$\tau_4 = \tau_2 = \phi/3, \tag{S-40}$$

$$\tau_5 = \tau_3 = -\sec\frac{\phi}{6}\Big(\tau_1\cos\frac{\phi}{2} + \sin\frac{\phi}{2}\Big). \tag{S-41}$$

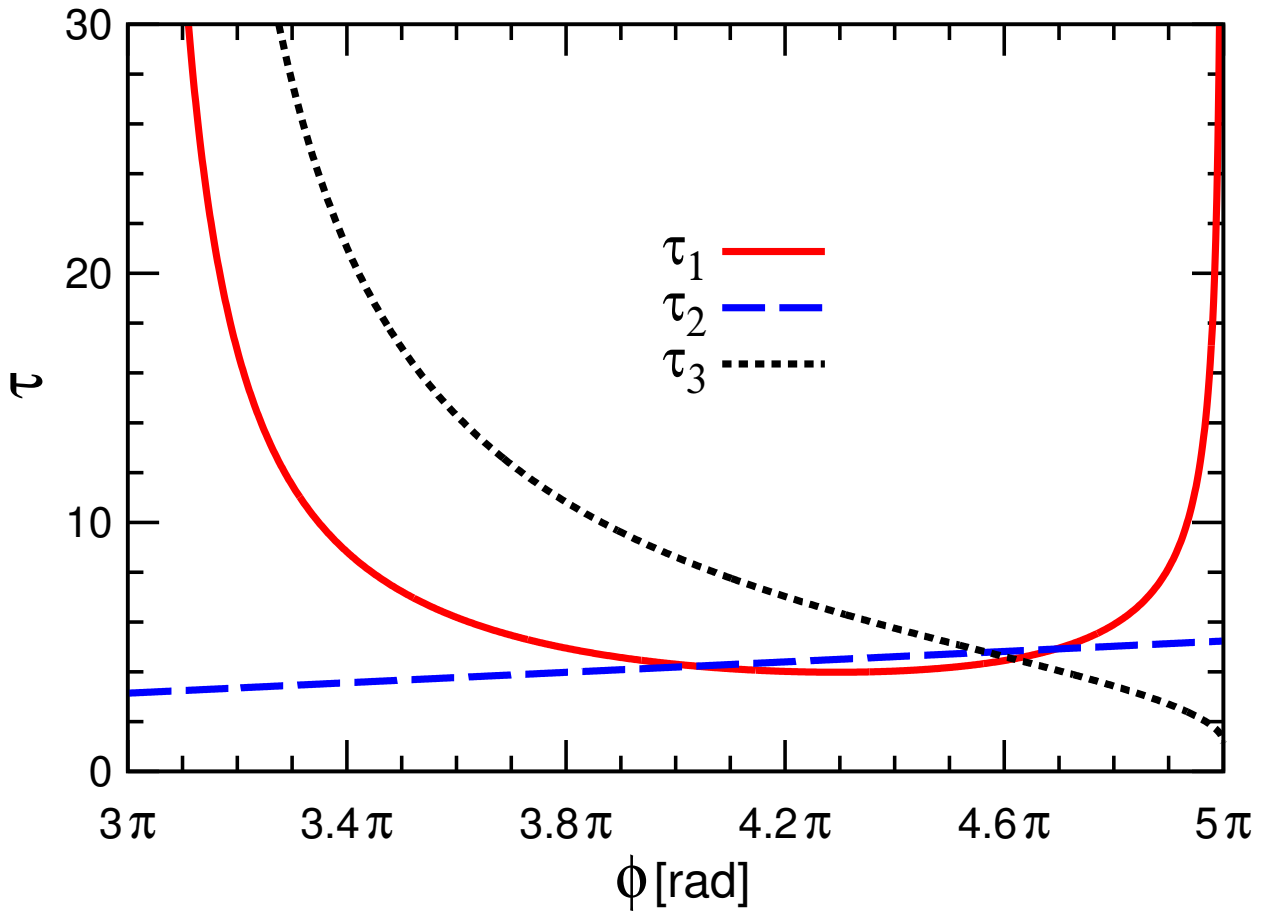

FIG. SI2: Parameters for the seven-piece pulse as defined in Sec. III C.

A plot of these parameters as a function of ϕ is given in Fig SI2. Note that this pulse is defined for $\phi \in (3\pi, 5\pi)$, which is equivalent to a rotation $R(\hat{z};\phi_0)$ with $\phi_0 \in (-\pi,\pi)$.

As $\phi \to 3\pi$, both $\tau_1, \tau_3 \to \infty$, $\tau_2 = \tau_4 = \pi$. However, in this limit, we have

$$\frac{\tau_3}{\tau_1} \to \frac{4+3\sqrt{2}}{2+\sqrt{2}} = 1+\sqrt{2}. \tag{S-42}$$

Note that $\sin\frac{\pi}{8} = \sqrt{2-\sqrt{2}}/2$, and

$$\frac{\sin^2\frac{2\pi}{8} - \sin^2\frac{\pi}{8}}{\sin^2\frac{\pi}{8}} = 1+\sqrt{2}. \tag{S-43}$$

Therefore in this limit the pulse is nothing but the $n = 3$ Uhrig pulse, which can be understood in a similar way as in the previous section.

D. Nine-piece pulse sequence

In Eq. (S-23) we take $N = 9$ and the nine-piece pulse sequence can be expressed as $\tau_1 = \tau_9$, $\tau_2 = \tau_4 = \tau_6 = \tau_8 = \phi/4$, $\tau_3 = \tau_7$, $J_1 = J_3 = J_5 = J_7 = J_9 = 0$, $J_2 = J_4 = J_6 = J_8 = J_{\max}$. Now there is one more independent variable, which means that we are able to cancel the dependence of $U(T_f, 0)$ on δh up to the third order. The expansion of the evolution operator is complicated, so we start with the first order in δh, which is

$$-i\frac{\delta h}{2J_{\max}}\left(\tau_5 + 2\tau_3\cos\frac{\phi}{4} + 2\tau_1\cos\frac{\phi}{2} + 2\sin\frac{\phi}{2}\right)\sigma_x. \tag{S-44}$$

Making this term vanish requires

$$\tau_5 = -2\left(\tau_3\cos\frac{\phi}{4} + \tau_1\cos\frac{\phi}{2} + \sin\frac{\phi}{2}\right). \tag{S-45}$$

Using Eq. (S-45), the expansion simplifies to a function only dependent on τ_1, τ_3 and ϕ. To further simplify the

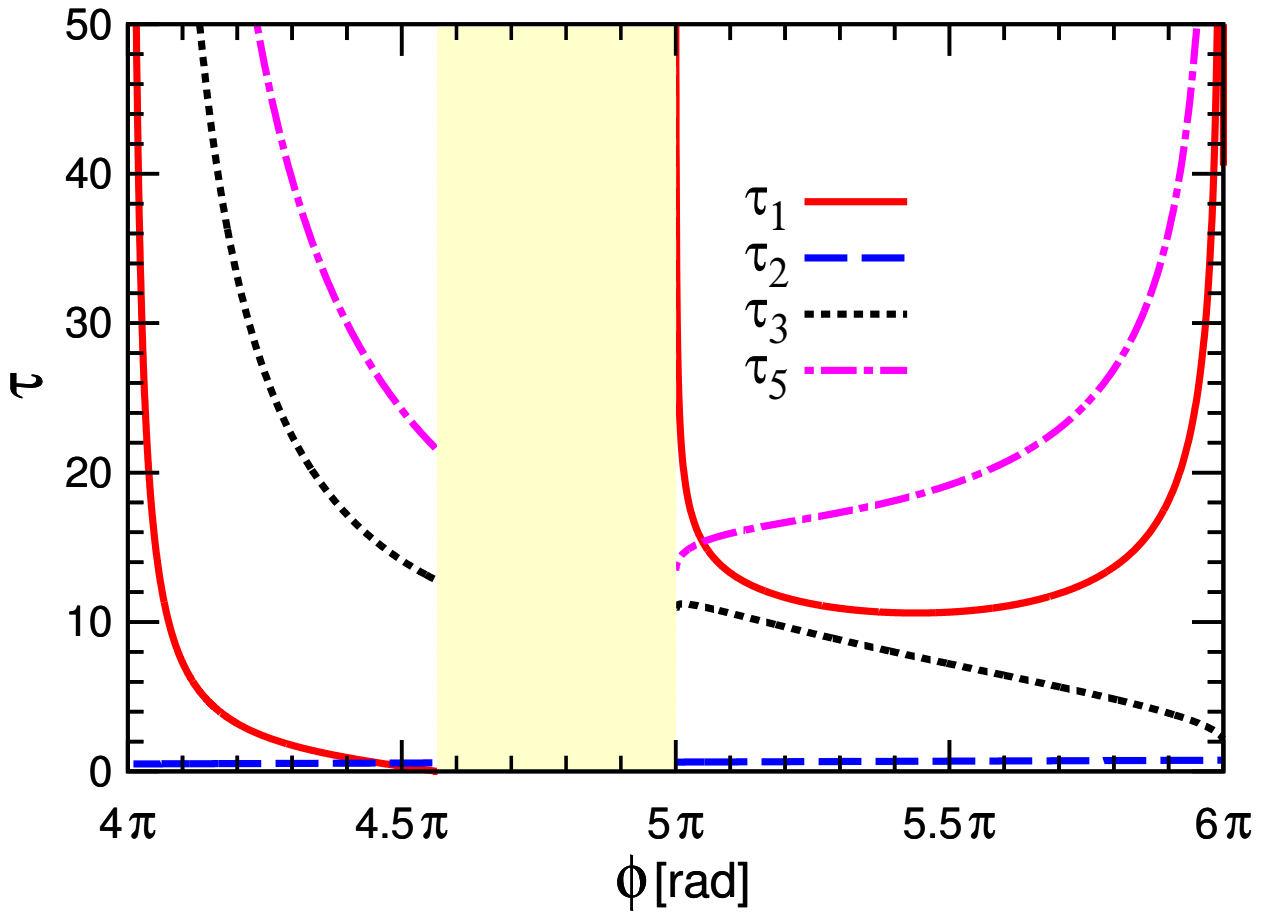

FIG. SI3: (Color online.) Parameters for the nine-piece pulse as defined in Sec. III D. The area shaded by light yellow indicate the regime where positive τ_1 cannot be found.

notations we introduce functions

$$\begin{aligned} f_1(\tau_1,\tau_3,\phi) = {} & -2\tau_1 - 4\tau_3 - \phi + 6\tau_3\cos\frac{\phi}{4} + 4\tau_1\cos\frac{\phi}{2} - 2\tau_3\cos\frac{3\phi}{4} \\ & - 2\tau_1\cos\phi - 2\tau_1\tau_3\sin\frac{\phi}{4} + (\tau_3^2+4)\sin\frac{\phi}{2} + 2\tau_1\tau_3\sin\frac{3\phi}{4} + (\tau_1^2-1)\sin\phi, \end{aligned} \tag{S-46}$$

$$\begin{aligned} f_2(\tau_1,\tau_3,\phi) = {} & 2\tau_3^2\cos\frac{\phi}{4} + 2\Big[\tau_1^3 + 3\tau_1(3+\tau_3^2) + 3(4\tau_3+\phi)\Big]\cos\frac{\phi}{2} - 2\tau_3(15 - 3\tau_1^2 + \tau_3^2)\cos\frac{3\phi}{4} \\ & - 6\tau_1(\tau_3^2+4)\cos\phi - 6(\tau_1^2-1)\tau_3\cos\frac{5\phi}{4} - 2\tau_1(\tau_1^2-3)\cos\frac{3\phi}{2} - 3\tau_3(4\tau_3+\phi)\sin\frac{\phi}{4} \\ & - 6\Big[-1 + \tau_1^2 - 3\tau_3^2 + \tau_1(4\tau_3+\phi)\Big]\sin\frac{\phi}{2} + 36\tau_1\tau_3\sin\frac{3\phi}{4} + 6(2\tau_1^2 - \tau_3^2 - 2)\sin\phi \\ & - 12\tau_1\tau_3\sin\frac{5\phi}{4} + 2(1-3\tau_1^2)\sin\frac{3\phi}{2}. \end{aligned} \tag{S-47}$$

With these definitions, we express the expansion of the evolution operator as

$$\begin{aligned} U(T_f,0) = {} & \Big(\cos\frac{\phi}{2}I - i\sin\frac{\phi}{2}\sigma_z\Big) \\ & + \frac{\delta h^2}{4J_{\max}^2} f_1(\tau_1,\tau_3,\phi)\Big[\sin\frac{\phi}{2}I + i\cos\frac{\phi}{2}\sigma_z\Big] - i\frac{\delta h^3}{24J_{\max}^3} f_2(\tau_1,\tau_3,\phi)\sigma_x \\ & + \mathcal{O}\Big[\Big(\frac{\delta h}{J_{\max}}\Big)^4\Big]. \end{aligned} \tag{S-48}$$

To cancel the dependence of $U(T_f,0)$ on δh up to third order, we must find τ_1 and τ_3 as positive, real solutions to the coupled nonlinear equations

$$\begin{cases} f_1(\tau_1,\tau_3,\phi) = 0 \\ f_2(\tau_1,\tau_3,\phi) = 0 \end{cases}, \tag{S-49}$$

while at the same time requiring a positive τ_5.

We found a numerical solution to the above equations for $\phi \in (4\pi, 4.5654\pi) \cap (5\pi, 6\pi)$, which corresponds to rotation $R(\hat{z};\phi_0)$ with $\phi_0 \in (0, 0.5654\pi) \cap (\pi, 2\pi)$. The numerical solution is shown in Fig. SI3.

IV. PIECEWISE PULSE SEQUENCES FOR $h_0 \simeq J_{\max}/4$

As described in the main text, we perform corrected rotations as $\tilde{R}\tilde{I}$ where the implementation of the identity $\tilde{I}$ is chosen such that the first order errors in δh exactly cancel those from the rotation $\tilde{R}$. Our implementations of $\tilde{I}$ are

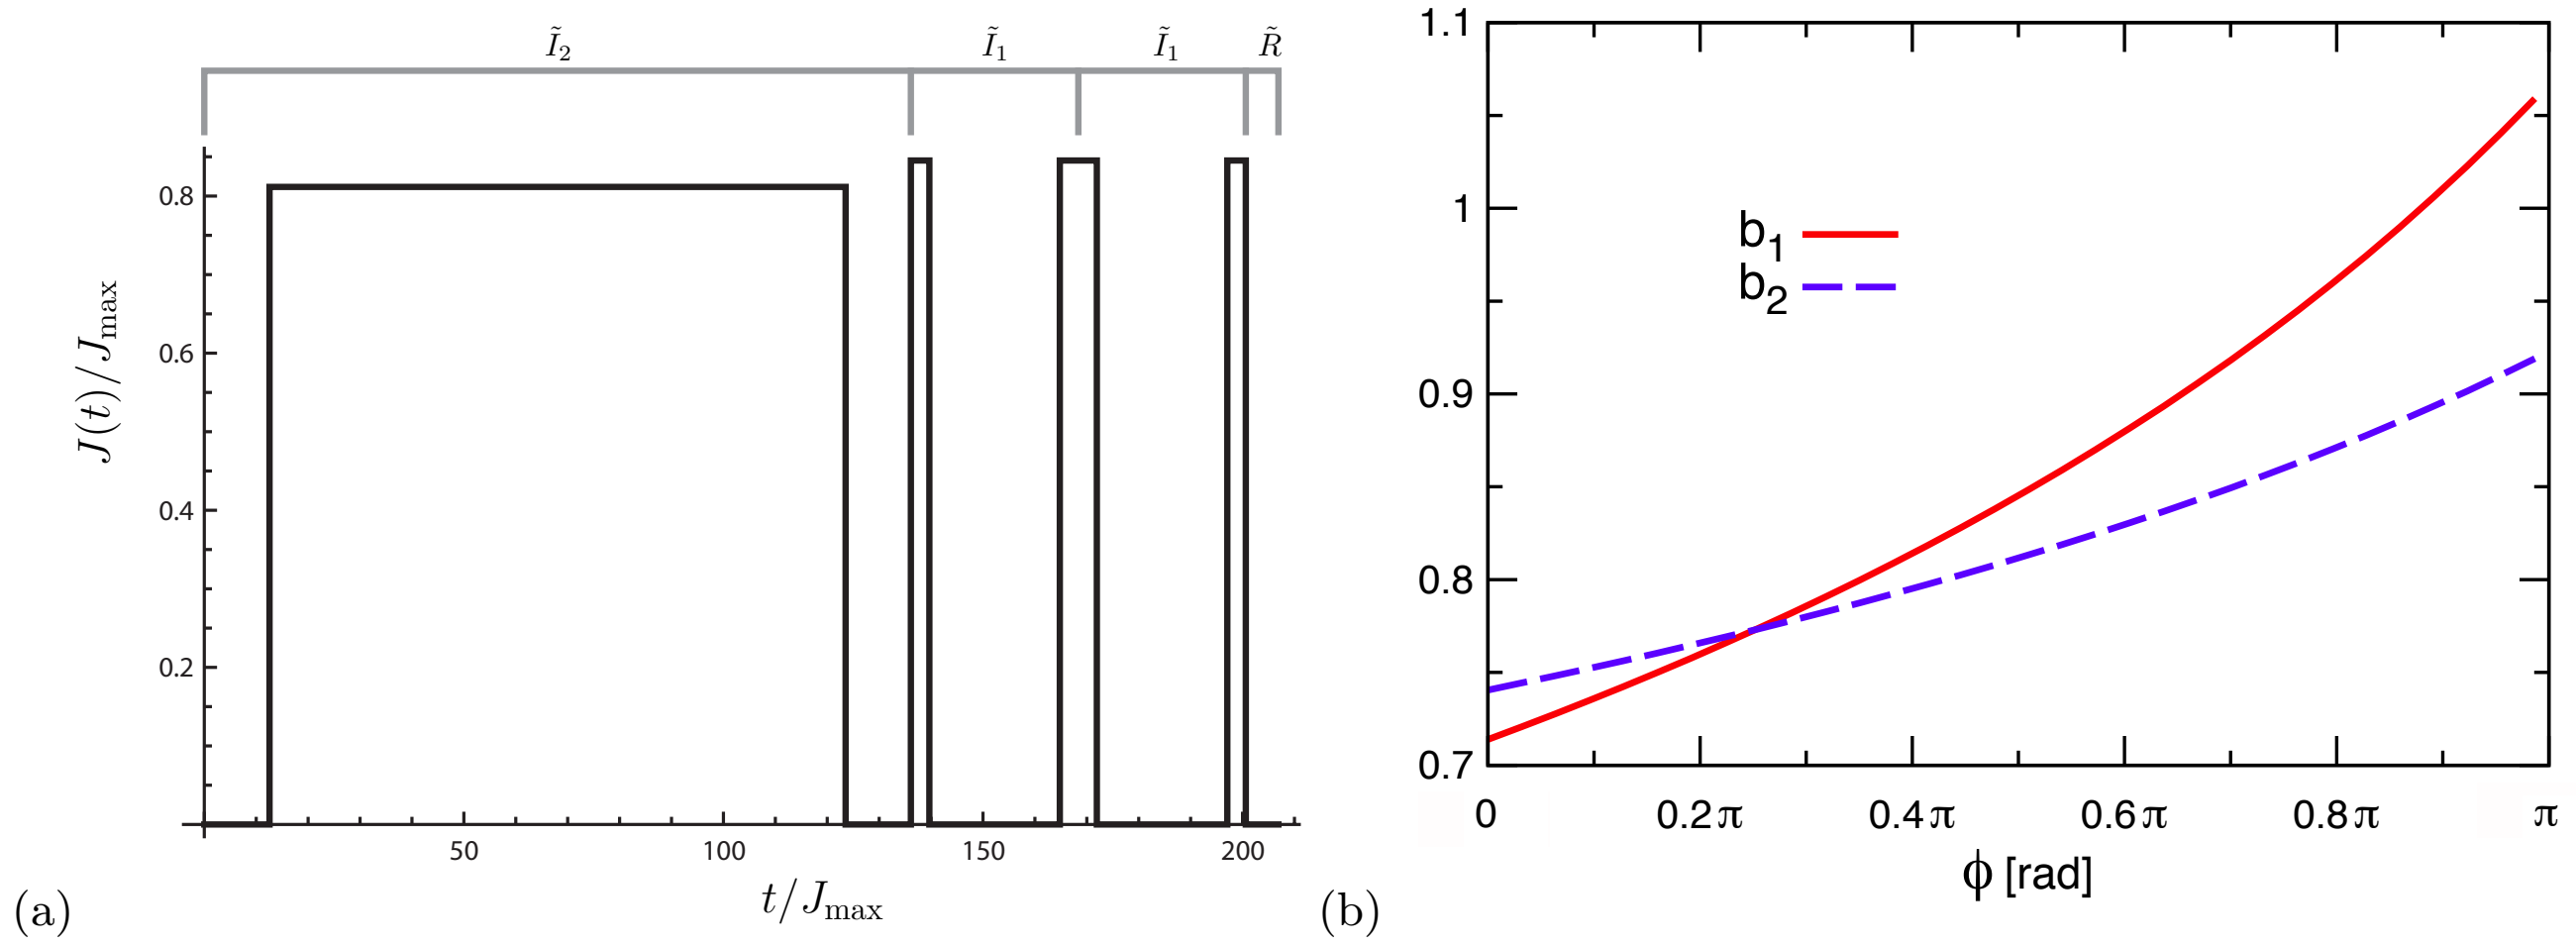

FIG. SI4: (Color online.) Panel (a): Example of a pulse sequence for rotation about the x-axis by $\pi/2$ with $h_0 = J_{\max}/4$. Panel (b): Parameters for rotations about the x-axis for the same h_0 value and $0 \leq \phi \leq \pi$.

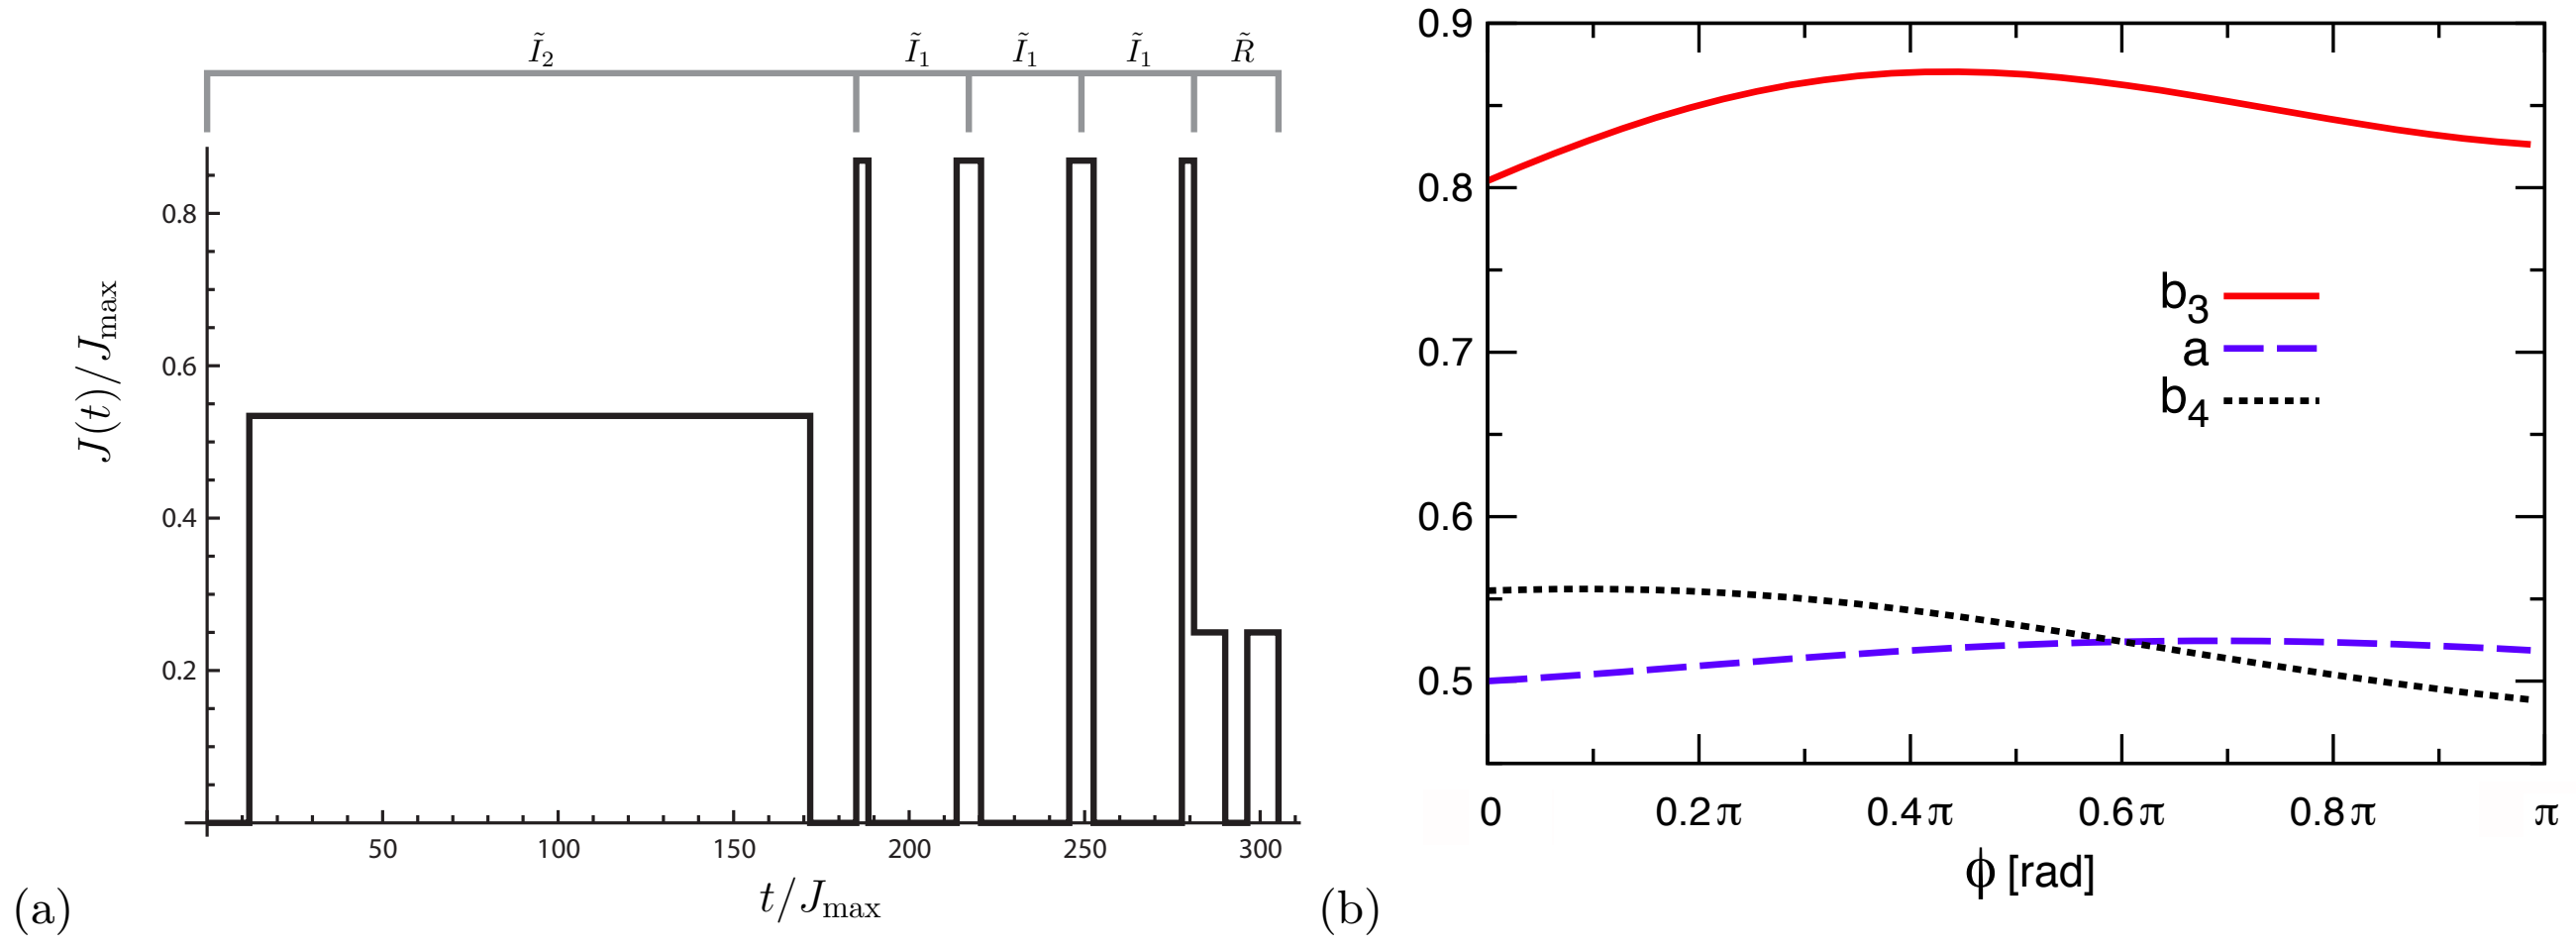

FIG. SI5: (Color online.) Panel (a): Example of a pulse sequence for rotation about the z-axis by $\pi/2$ with $h_0 = J_{\max}/4$. Panel (b): Parameters for rotations about the z-axis for the same h_0 value and $0 \leq \phi \leq \pi$.

of the form

$$\tilde{I}(\hat{r};\phi) = \prod_i \tilde{I}_{n_i}(a_i, b_i), \tag{S-50}$$

where the parameters a_i, b_i are restricted by the physical constraint $0 \leq J(t) \lesssim J_{\max}$. For the specific forms $\tilde{I}_1$, $\tilde{I}_2$ given in the main text, this translates to the constraints

$$0 \leq a_i \leq 1, \tag{S-51}$$

$$0 \leq b_i \lesssim 1. \tag{S-52}$$

The particular implementation of $\tilde{I}$ that will be chosen for a given experimental situation will depend on the particular rotation $\tilde{R}$ as well as the experimental parameters $h_0/J_{\max}$, with a combinatorial search necessary to find an implementation that: (a) cancels the first-order error from $\tilde{R}$; (b) satisfies the constraints of Eqs. (S-51) and (S-52); and (c) is close to 'optimal' in some experimentally meaningful sense, such as having the overall shortest duration in time, having the smallest second-order error in δh, or being least sensitive to over-/under-shoot in $J(t)$. As an example of our technique we found sequences valid for $h_0 \simeq J_{\max}/4$, for corrected rotations about angles $0 \leq \phi \leq \pi$ around the x- and z-axes. For the x-axis rotation we have

$$R(\hat{x};\phi) + \mathcal{O}(\delta h)^2 = \tilde{R}(\hat{x};\phi)\tilde{I}_1(1/2,b_1)^2\tilde{I}_2(1/2,b_2,15). \tag{S-53}$$

The first-order term in δh is zero when $b_{1,2}$ are chosen to satisfy

$$\frac{\phi}{2\pi} = -\frac{2\tilde{h}^3}{\left(\tilde{h}^2+b_1^2\right)^{3/2}} - \frac{15\tilde{h}^3}{\left(\tilde{h}^2+b_2^2\right)^{3/2}} + \frac{4b_1^2}{\tilde{h}^2+b_1^2} - 3, \tag{S-54}$$

$$\frac{2\sqrt{\tilde{h}^2+b_1^2}+\tilde{h}}{\left(\tilde{h}^2+b_1^2\right)^{3/2}} = \frac{15b_2\tilde{h}}{2b_1\left(\tilde{h}^2+b_2^2\right)^{3/2}}, \tag{S-55}$$

where we have introduced the dimensionless parameter $\tilde{h} = h_0/J_{\max}$. The solution to these equations for $\tilde{h} = 1/4$ are shown in Fig. SI4. In Fig. SI4(a) we show a specific example of the pulse sequence for $\pi/2$ rotation about the x-axis. Fig. SI4(b) shows solutions for a range of rotation angle $0 \leq \phi \leq \pi$. For certain values of ϕ close to π, b_1 exceeds 1 by up to 7% but this is not a problem because $J_{\max}$ is not typically a hard limit for pulse amplitudes.

For the same parameter range we construct the corrected z-axis rotation as

$$R(\hat{z};\phi) + \mathcal{O}(\delta h)^2 = \tilde{R}(\hat{x}+\hat{z};\pi)\tilde{R}(\hat{x};\phi)\tilde{R}(\hat{x}+\hat{z};\pi)\tilde{I}_1(1/2,b_3)^3\tilde{I}_2(a,b_4,15), \tag{S-56}$$

with a and $b_{3,4}$ satisfying

$$\frac{6\tilde{h}^3}{\left(\tilde{h}^2+b_3^2\right)^{3/2}} + \frac{30\tilde{h}^3}{\left(\tilde{h}^2+b_4^2\right)^{3/2}} + \frac{12\tilde{h}^2}{\tilde{h}^2+b_3^2} + \frac{\sin\phi}{\pi} + \frac{\cos\phi+1}{2\sqrt{2}} = 4, \tag{S-57}$$

$$\cos\phi = \frac{30\pi b_4\tilde{h}^2\sin(2\pi a)}{\left(\tilde{h}^2+b_4^2\right)^{3/2}} + \frac{\pi\sin\phi}{2\sqrt{2}} + 1, \tag{S-58}$$

$$\frac{30b_4\tilde{h}\cos(2\pi a)}{\left(\tilde{h}^2+b_4^2\right)^{3/2}} + \frac{12b_3}{\tilde{h}^2+b_3^2} + \frac{6b_3\tilde{h}}{\left(\tilde{h}^2+b_3^2\right)^{3/2}} + \frac{\phi}{\pi\tilde{h}} + \frac{1}{\sqrt{2}\tilde{h}} = 0. \tag{S-59}$$

The solution to these equations is shown in Fig. SI5. We show in Fig. SI5(a) an example of the pulse sequence appropriate for rotating about the z-axis by $\pi/2$, while in Fig. SI5(b) we show solutions for $0 \leq \phi \leq \pi$.

---

[1] To see this fact, note that the operator $\exp[-i(h\sigma_x/2 + J_k\sigma_z/2)t_k]$ can be written in the form $A_i = a_{i0}I + a_{ix}\sigma_x + a_{iz}\sigma_z$ with a_{i0}, a_{ix}, a_{iz} arbitrary complex numbers. It is then straightforward to show that for any operators A_1 and A_2 with arbitrary coefficients, $A_2 \cdot A_1 \cdot A_2$ can also be written in such a form, free of σ_y terms. Applying this statement recursively to Eq. (S-23), one sees that for any $J(t)$ satisfying $J(t) = J(T_f - t)$ the resulting evolution operator U does not contain σ_y component.

[2] G. S. Uhrig, Phys. Rev. Lett. **98**, 100504 (2007).

[3] H. Y. Carr and E. M. Purcell, Phys. Rev. **94**, 630 (1954); S. Meiboom and D. Gill, Rev. Sci. Instrum. **29**, 688 (1958).